


Double Stack Terminals

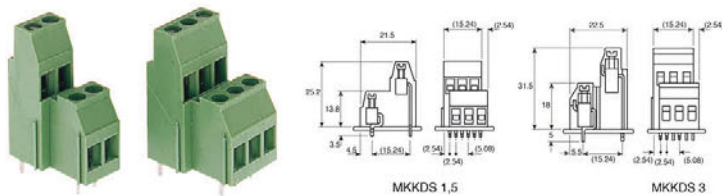

Offset levels allow side stacking up to 30-way.
Approvals: UL (E60425); CSA (LR13631)

Description	Number Of Ways	Wire Size (awg)	Current Rating (A)	Manu. Part No.	Stock no.
Double Stack Terminal Standard	2	14 - 26	24	1725038	193-0609
Double Stack Terminal Standard	3	14 - 26	24	1725041	193-0615
Double Stack Terminal High Current	2	12 - 24	32	1721728	189-5944
Double Stack Terminal High Current	3	12 - 24	32	1721731	189-5950

Manu. Part No.	Stock no.	Price per	OM	SS	SS	SS
1725038	193-0609	unit	5+	2.68	75+ 2.60	250+ 2.55
1725041	193-0615	unit	5+	4.06	75+ 3.94	250+ 3.86
1721728	189-5944	unit	5+	3.44	75+ 3.34	250+ 3.27
1721731	189-5950	unit	5+	5.14	75+ 4.99	250+ 4.88

Screw Terminals

Cost effective PCB screw terminals.

Approvals: VDE; UL; CSA

Wire Size	1.5 mm ²
Current Rating	10 A



Description	Number Of Ways	Manu. Part No.	Stock no.
Screw Terminal Orange	2	1760490000	408-7871
Screw Terminal Orange	3	1760500000	408-7887
Screw Terminal Black	2	1760510000	425-8720
Screw Terminal Black	3	1760520000	425-8736

Manu. Part No.	Stock no.	Price per	OM	SS	SS	SS
1760490000	408-7871	unit	5+	0.95	75+ 0.88	250+ 0.78
1760500000	408-7887	unit	5+	1.39	75+ 1.29	250+ 1.16
1760510000	425-8720	unit	5+	0.65	75+ 0.59	250+ 0.50
1760520000	425-8736	unit	5+	0.97	75+ 0.86	250+ 0.74

MKDS/MKDSN Series Screw Terminals – (THR) Reflow Solder Tolerant



These high temperature liquid crystal polymer PCB terminal blocks are reflow solder tolerable, and will enable a greater proportion of a PCB to be populated and reflow soldered in one operation. Maximum temperature capability is 260°C for 15 seconds. Recommended as being suitable for temperature profiles based on EN 61 760-01. When used in reflow oven it is recommended that these components are heat treated at +125°C for 48 hrs prior to use. Available in 2-way and 3-way versions, in standard and low-profile heights. Rated at 320V/13.5-17.5 A.

- Removes the necessity for costly subsequent soldering operations
- The through hole fixing offers high mechanical stability
- 5.08mm pitch

MKDSN 1.5 wire acceptance: solid/flexible max. 1.5mm², H 10, D 8.1

MKDS 1.5 wire acceptance: flexible 1.5mm², solid 2.5mm², H 13.8, D 9.8

MKDSN 2.5 wire acceptance: flexible and solid 2.5mm², H 15, D 9.5

Description	Number Of Ways	Wire Size	Current Rating (A)	Manu. Part No.	Stock no.
MKDSN Terminal Low Profile 1.5	2	26-16	13.5	MKDSN 1,5/ 2-5,08 HT BK	467-0316
MKDSN Terminal Low Profile 1.5	3	26-16	13.5	MKDSN 1,5/ 3-5,08 HT BK	467-0322
MKDS Terminal Standard 1.5	2	24-16	24	1985904	467-0350
MKDS Terminal Standard 1.5	3	24-16	24	MKDS 1,5/ 3-5,08 HT BK	467-0366
MKDSN Terminal Low Profile 2.5	2	24-14	16	1985946	467-0417
MKDSN Terminal Low Profile 2.5	3	24-14	16	1985959	467-0401

Manu. Part No.	Stock no.	Price per	OM	SS	SS	SS
MKDSN 1,5/ 2-5,08 HT BK	467-0316	unit	5+	1.00	75+ 0.97	250+ 0.95
MKDSN 1,5/ 3-5,08 HT BK	467-0322	unit	5+	1.50	75+ 1.46	250+ 1.43
1985904	467-0350	unit	5+	1.22	75+ 1.18	250+ 1.16
MKDS 1,5/ 3-5,08 HT BK	467-0366	unit	5+	1.86	75+ 1.80	250+ 1.77
1985946	467-0417	unit	5+	0.90	75+ 0.87	250+ 0.86
1985959	467-0401	unit	5+	1.40	75+ 1.36	250+ 1.33


7.62mm Pitch Screw Terminals

Vertical, PCB Mount Screw Terminals

- High quality PCB mount screw terminals that allow large air and creepage distances
- Side stackable (0.25-4mm²)
- Rigid housing withstands external forces
- Wire acceptance 12-24 a.w.g.
- Rec. PCB hole dia. 1.3mm
- Flammability Class UL 94 V-2
- Rated at 24A/630V
- 5.08mm pitch

Approvals: UL (E60425); CSA (LR13631)

Manu. Part No.	Number Of Ways	Stock no.	Price per	OM	SS	SS	SS
GMKDS 3/2-7.62	2	189-5966	unit	5+	1.89	75+ 1.83	250+ 1.80
GMKDS 3/3-7.62	3	189-5972	unit	5+	3.49	75+ 3.39	250+ 3.32

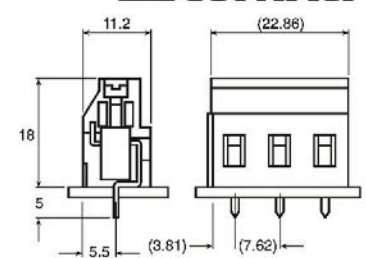

10.16mm Pitch Screw Terminals


High Power Terminal

These 690V/57A screw terminals enable larger conductor cross sections to be directly connected to PCBs, for use in power supplies, converters, charging units or any applications where higher power is required.

- Side stackable without loss of pitch
- 2 pins per terminal provide secure mechanical anchoring
- Wire acceptance range 0.5-10mm² (20-6 awg)
- Suitable for 300 / 600V converters to UL408C
- Integral test points accept up to 2.3mm probes

Approvals: UL (E60425); CSA (LR13631)

Manu. Part No.	Number Of Ways	Stock no.	Price per	OM	SS	SS	SS
"MKDSP 10N/2-10	2	314-9861	unit	5+	9.15	75+ 8.88	250+ 8.69
1706798	3	314-9877	unit	5+	12.40	75+ 12.00	250+ 11.80

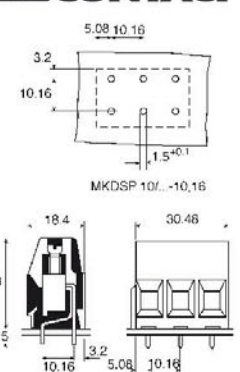


Multi-Pitch Terminals

Standard Terminals

- Snap-together screw-less terminals suitable for use in vibration and shock environments
- Optional end-plate allows multiple-way terminal blocks to be built
- Pin size 0.75 x 0.75mm

Current Rating	15 A	Wire Size	26 - 14 awg
Voltage Rating	300 V		



Manu. Part No.	Number Of Ways	Pitch (mm)	Stock no.	Price per	OM	SS	SS	SS
236-401	1	5 / 5.08	531-497	unit	10+	0.28	150+ 0.25	500+ 0.24
236-402	2	5 / 5.08	131-9131	unit	10+	1.08	150+ 1.01	500+ 0.92
236-403	3	5.08	131-9147	unit	10+	1.38	150+ 1.37	500+ 1.34
236-412	12	5.08	180-9331	unit	5+	5.20	75+ 4.67	250+ 4.52

Accessories

Description	Stock no.	Price per	OM	SS	SS	SS
End Plate, Grey	531-504	unit	10+	0.11	150+ 0.10	500+ 0.09

RS Online: over 550,000 products in one place, at the touch of a button.

www.rssingapore.com

Instant stock levels online!

www.rssingapore.com

