


SPECIFICATIONS

BODY MATERIAL: THERMOPLASTIC (UL 94V-0)GREEN
 TERMINALS: TIN PLATED BRASS
 SCREWS: NICKEL PLATED STEEL
 WIRE RANGE AWG: 18-24 STR
 RATING: 10AMPERES,300VAC
 INSULATION WITHSTANDS VOLTAGE AC 1500V
 INSULATION RESISTANCE 500M OR MORE AT DC 500V

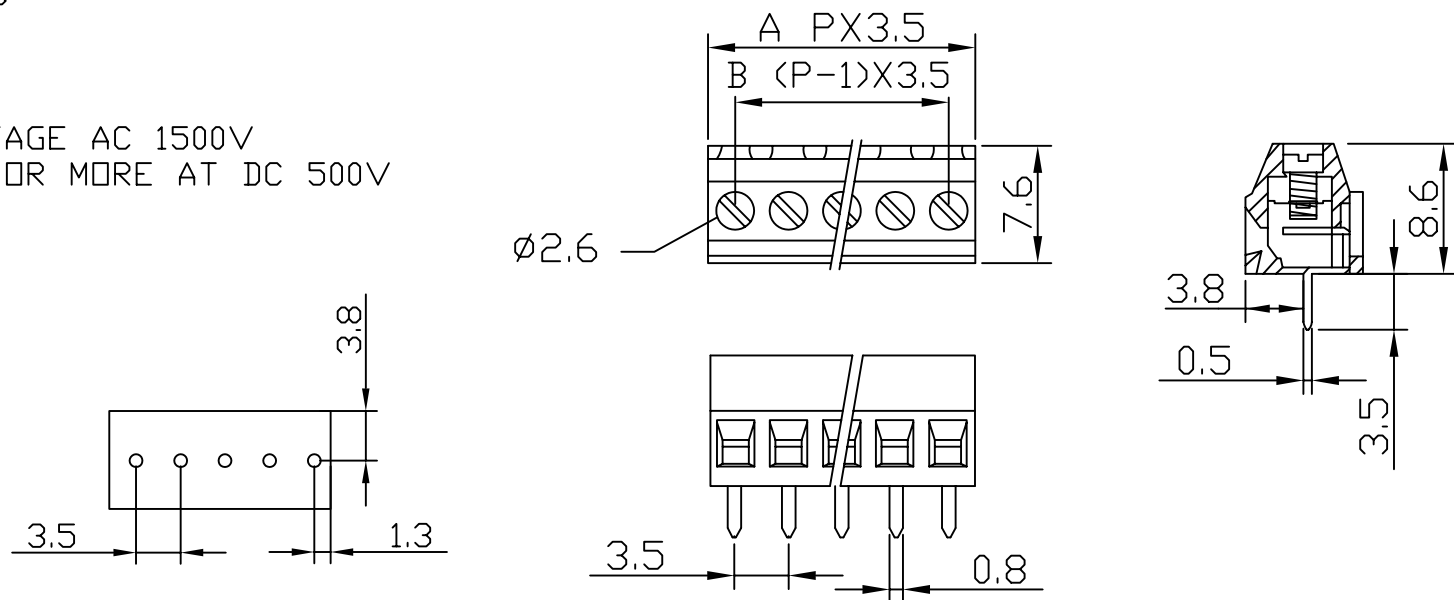

DIMENSION: ±0.5

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15			
A	7	10.5	14	17.5	21	24.5	28	31.5	35	38.5	42	45.5	49	52.5			
B	3.5	7	10.5	14	17.5	21	24.5	28	31.5	35	38.5	42	45.5	49			
POLE	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
A	56	59.5	63	66.5	70	73.5	77	80.5	84	87.5	91	94.5	98	---	---	---	---
B	52.5	56	59.5	63	63.5	70	73.5	77	80.5	84	87.5	91	94.5	---	---	---	---

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

TBH035-D08-xx-LF

SERIES

LEADFREE

02-28 AWG

HIGH 8.6mm

DIP 180°

DESCRIPTION: