




# ACTUAL SIZE

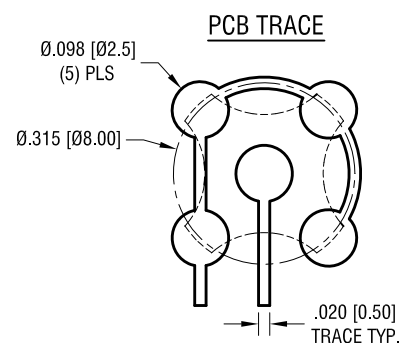

KEYPAD DOMES ARE DESIGNED  
TO BE PLACED ON PCB, NOT SOLDERED

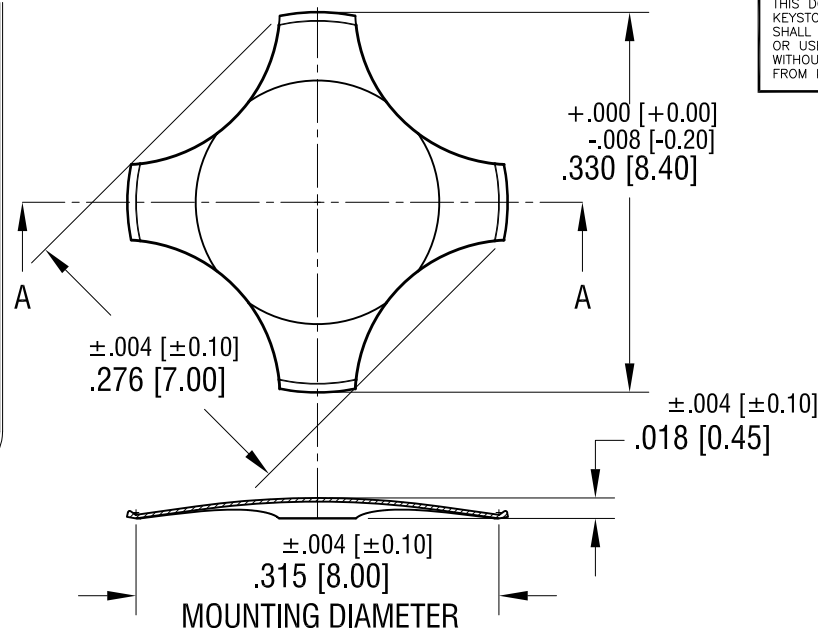

## SECTION A-A

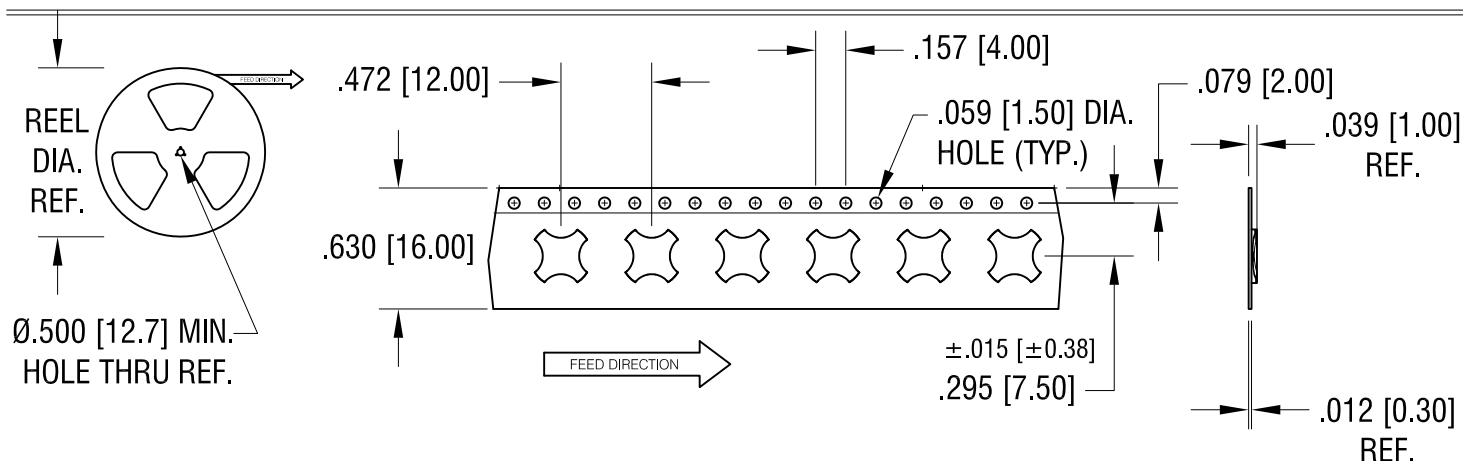

### DOMES SPECIFICATIONS:

1. VOLTAGE/CURRENT MAXIMUM: 12mA@ 24 Volts DC
2. OPERATING TEMPERATURE: -40°C TO 105°C
3. STORAGE TEMPERATURE: -55°C TO 125°C
4. MAT'L: .003 [0.08] STAINLESS STEEL
5. FINISH: NICKEL PLATE
6. TRIP FORCE: 220g

### NOTES: SUPPLIED ON TAPE AND REEL ONLY

#### TAPE AND REEL SPECIFICATIONS:

1. TAPE:  
MAT'L - ALL CONDUCTIVE POLYSTYRENE CARRIER  
ANSI/EIA-481 STANDARD
2. REEL:  
13.0 [330.2] DIA. 5000 PIECES PER REEL

8.26.19 REMOVE DIMPLE FROM DOME  
TAPE WIDTH WAS 24mm  
CHANGE AS PER ECN 072

A

REV.

KEYSTONE ELECTRONICS CORP.			
www.keyelco.com ● NEW HYDE PARK, NY 11040● Tel (516) 328-7500			
PART NAME		MINI 4 LEG DOME	
MATERIAL		AS NOTED	
FINISH		DRN BY	DATE
AS NOTED		NT	2.15.17
		APP'D	SCALE
		RH	6X, 1X
TOLERANCES		INCH	[MM]
DECIMAL		± .005	[± 0.13]
ANGULAR		± 1°	
UNLESS OTHERWISE SPECIFIED		C	DWG NO.
			5133TR

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Keystone Electronics:](#)

[5133TR](#)